


# Техническа информация

## GLOSSCLEAR C 2560

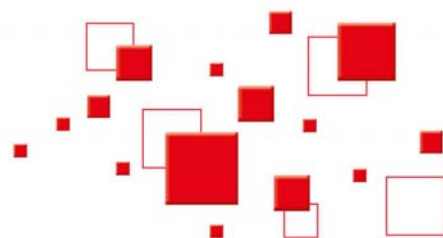

Лак за перфектни резултати

Category: **C 4**

### Област на приложение

Clear with reliable application properties, excellent flow, good levelling and a high-quality finish for applications ranging from the repair of individual panels to overall resprays.

### Допълнителна информация

#### Техническа информация

Съдържание на солидни вещества 59 % ± 2	Плътност 0.900 – 1.100 g/cm <sup>3</sup>
Температура на съхранение мин. 5°C до макс. 45°C	Срок на годност 36 месеца

### Приложение

Смесете добре и прецедете преди нанасяне.

Забележка: Може също така да се използват разредителите R 2100 и R 2300 според температурата и размера на детайла.

### Почистване / Подготовка

GLOSSCLEAR C 2560 се нанася върху ONYX HD.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at [www.rmpaint.com](http://www.rmpaint.com) or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 06/2016



