


Техническа информация

EXTREMECLEAR C 2580

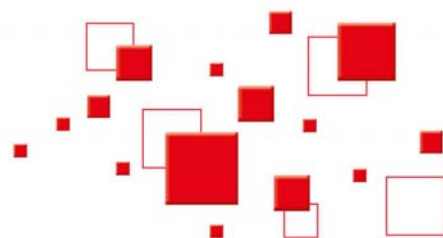

Clear for refinishing scratch-resistant OEM finishes

Product Category: **C 4**

Област на приложение

Low-solvent clear for repairing vehicles with scratch-resistant original paint finishes.

Допълнителна информация

Техническа информация

Съдържание на солидни вещества 61 % ± 2	Плътност 0.900 – 1.100 g/cm ³
Температура на съхранение мин. 5°C до макс. 45°C	Срок на годност 36 месеца

Приложение

Mix well and strain before application.

Note: Alternatively use R 2100 and R 2300 thinners depending on temperature and panel size.

Почистване / Подготовка

EXTREMECLEAR C 2580 is intended for use on ONYX HD.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.rmpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 06/2016



