


Technical Information

UNO HD SC 403

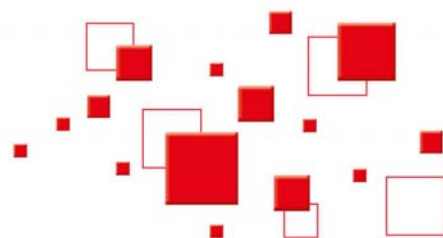

Jet black

Product Category: **C 3.3**

Fields of use

Factory-packed jet black UNO HD direct-gloss topcoat.

Additional Information

Technical characteristics

Solids content 59 % ± 2	Density 0.950 – 1.050 g/cm ³
Storage temperature min. 5°C to max. 45°C	Shelf life 36 months

Application

Stir well before use.

Use the SC 820 / R 2100 thinner for small repairs or when working in low temperatures.

Use the slower SC 880 / R 2300 thinner in temperatures above 25°C or when refinishing large surfaces.

Depending on the desired result, the amount of thinner added may be increased to up to 35%.

Substrate / Pre-treatment / Cleaning

Clean with PK 700 or PK 2000.

Sand with P400 (sanding filler and well-cured or solvent-resistant old paintwork).

Clean with PK 700 or PK 2000.

Alternative: apply to R-M wet-on-wet filler or sealer.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our products, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the products for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein are for general information purpose only; they may change without prior information and do not constitute the agreed contractual quality of the products (product specification). The latest version supersedes all previous versions. You can obtain the latest version from our website at www.mpaint.com or directly from your sales partner. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.

R-M Automotive Refinish Paints, Z.I. du Merret F-60676 Clermont de l'Oise Cedex, Tel. (+33) (0) 3 44 77 77 77, 12/2015



